

# Power Pack

- hydraulically driven • Compact design – ready to work
- Width only 1.0 m (39“)




## Advantages

- Available with various HPT and VPC combinations
- Minimizes spaces needed for individual components
- Specially designed for truck mount units
- Saves assembly time
- Reduces weight of installation
- Improves weight distribution
- Standardizes sewer cleaning trucks
- Simplifies installation of liquid ring pump and high pressure transformer
- Power limited and regulated HPT water pressure pump and VPC vacuum pump available

## Equipment included

- VPC Vacuum pump equipped with hydraulic motor
- HPT High pressure water pump
- WT40 heat exchanger
- Oil reservoir
- Hydraulic oil cooler
- LWT air/slurry separator and water tank in stainless steel
- Suction/pressure change over valve
- Power Pack mounting frame
- Incl. tank tip cylinder mount

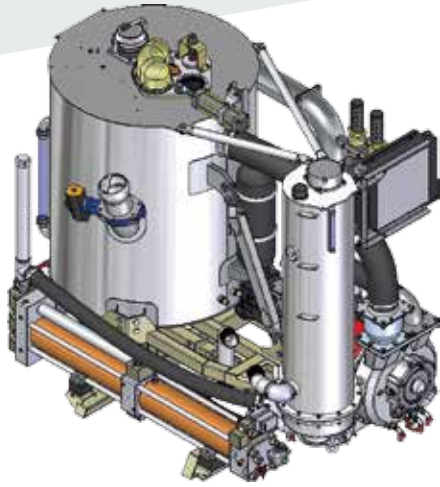

## Technical data

### HPT 70/VPC 80 Vacuum pump

Vacuum pump		High pressure pump	
up to 3'100 m <sup>3</sup> /h up to 1'824 ft <sup>3</sup> /min		up to 500 l/min – 200 bar up to 132 gpm – 2'900 PSI	
weight	length	width	height
1'330 kg 2'932 lbs	2'449 mm 96.4 in	1'300 mm 51.1 in	2'170 mm 85.4 in

### HPT 70/VPC 83 Vacuum pump

Vacuum pump		High pressure pump	
up to 4'000 m <sup>3</sup> /h up to 2'354 ft <sup>3</sup> /min		up to 500 l/min – 200 bar up to 132 gpm – 2'900 PSI	
weight	length	width	height
1'651 kg 3'639 lbs	2'463 mm 96.9 in	1'300 mm 51.1 in	2'170 mm 85.4 in

Also available with HPT 30 or HPT 50 => on request  
Technical specifications are approximate values and subject to change without notice.